



Matching all our
barred railings
to ensure
everything
blends together
perfectly
on the site



RAILINGS

myMIX® & EXALT® GUARDRAIL

CHOICES AND MODULAR DESIGN

- Guardrails matching all our models of **EXALT®** and **myMIX®** railings.
- Base-plated or surface-mounted post to suit all configurations.

EASY TO INSTALL

- Wall bracket.
- Angle management made possible due to the connection system and specially designed posts.

STYLE AND FINISH

- Perfect matching with **EXALT®** and **myMIX®** barred railings and **ALLIX®** gates.
- Modern design compatible with all architectural styles.
- Slot installation with invisible connections.

SECURITY

- Compliance with guardrail standards: NF P01-012 and NF P01-013 (CSTB).
- Screws are inaccessible after installation.
- Reinforced post.

CUSTOMISATION

- **6 standard colours:** ● ● ● ● ● ●
- Optional:
- 200 **RAL** colours.
- **Matt and textured finishes.**
- "Protect+" coating.

FEATURES

- Railings:
 - 3 rails of 50 × 30mm
 - Bar centre distance of 135mm
 - Space between bars is a maximum of 110mm
- Post:
 - 60 × 60mm square post
 - Flat base-plated, embedded or surface-mounted
- Finish:
 - Railings and posts in Sendzimir galvanised steel with polyester coating
 - Connection accessories provided: stainless steel "U" + self-tapping screw + black polyester end cap

HOUSING COMPLEXES



PUBLIC AREAS



SERVICE SECTOR SITES



INDUSTRIAL & LOGISTICS SITES





CONCEPT

4 models of EXALT® guardrails - 8 models of myMIX® guardrails

EXALT® Origin



EXALT® Urba



EXALT® Natura



EXALT® Delta



myMIX® Overstanding



myMIX® Non-overstanding




- Round bars (dia. 25 - 30) or square bars (straight or at a 45° angle)


TECHNICAL FEATURES

NOMINAL HEIGHT (mm)	SURFACE-MOUNTED POST LENGTH	POST CENTRE DIST. (mm)	POST SECTION	BAR SECTIONS	RECTANGULAR RAIL (mm)	BASE PLATES (mm)	SURFACE-MOUNTED POST WEIGHT	RAIL WEIGHT
1040	1215mm	1500	60 × 60 × 3mm	25 × 25mm straight	50 × 30 × 15	Stainless steel 150 × 150 × 6	between 2 and 2.6kg	between 17 and 23kg depending on the model
	BASE-PLATED POST LENGTH			25 × 25mm, 45° angle			BASE-PLATED POST WEIGHT	
	1040mm			dia. 25, dia.30			between 1.9 and 2.1kg	


EXALT® Natura



myMIX® Overstanding



myMIX® Non-overstanding



Ground clearance:




- For overstanding bars = 60mm
- For non-overstanding bars = 110mm




FITTING CONFIGURATIONS & INSTALLATION

Interlocking assembly of guardrails and posts:
Attachment system composed of a screw, a U and a sleeve.


- Base-plated
- Surface mount
- Wall bracket

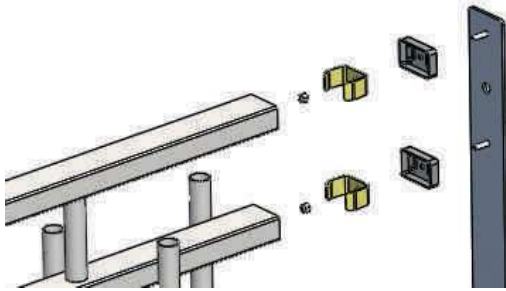

Wall bracket

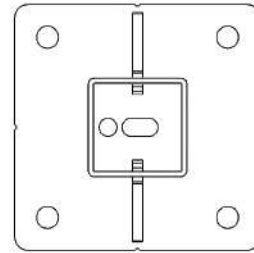

Base-plated

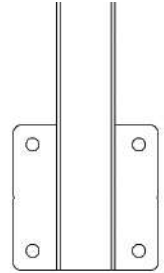


Surface-mounted


POST CONFIGURATION

With a base-plated post


Wall bracket




Starting or ending base plate
(right or left)



Middle base plate

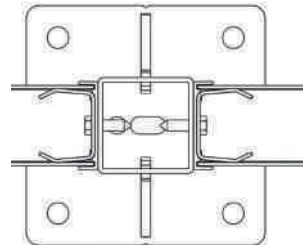


Angle base plate

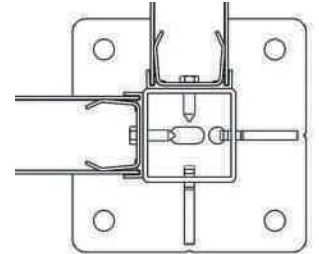


With a surface-mounted post


Surface-mounted starting or ending post (right or left)

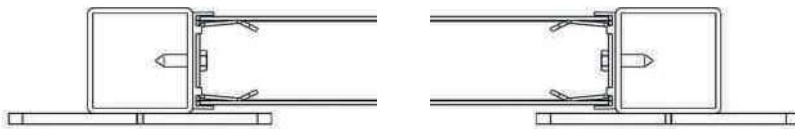

Surface-mounted
middle post



Surface-mounted
angle post

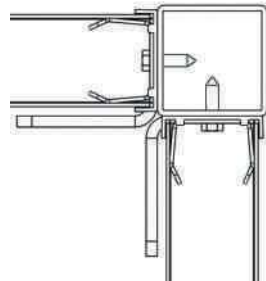



ADDITIONAL PRODUCTS

myMIX® and **EXALT**® barred railings.
ALLIX® cantilever, sliding and swing gates.

