



Suitable for sites with a moderate level of traffic



INDUSTRIAL SWING GATES

ESPACE MANUAL

SERVICE SECTOR SITES



INDUSTRIAL & LOGISTICS SITES



SENSITIVE SITES



A COST-EFFECTIVE ALTERNATIVE

- Suitable for numerous uses, for example: SME entrance or secondary entrances, public parks.

CHOICE

- Single- or double-leaf.

FUNCTIONAL

- Manual operation.
- Meets standards for PRM (persons with reduced mobility).

EASY INSTALLATION

- Reversible strike plate (bi-directional opening).
- Adjustable hinges (120° opening).
- Hinges: welded attachment plate.

SECURITY


- Surface-mounted Locinox lock with European cylinder.

FEATURES

- Infill: non-overstanding 25 × 25mm square bars, 110mm intervals
- Frame section 40 × 40mm
- Post section varies depending on the dimensions
- Finish: zinc-epoxy + polyester
- Colours: Green 6005 ●, Grey 7016 ●, White 9010 ○



TECHNICAL FEATURES

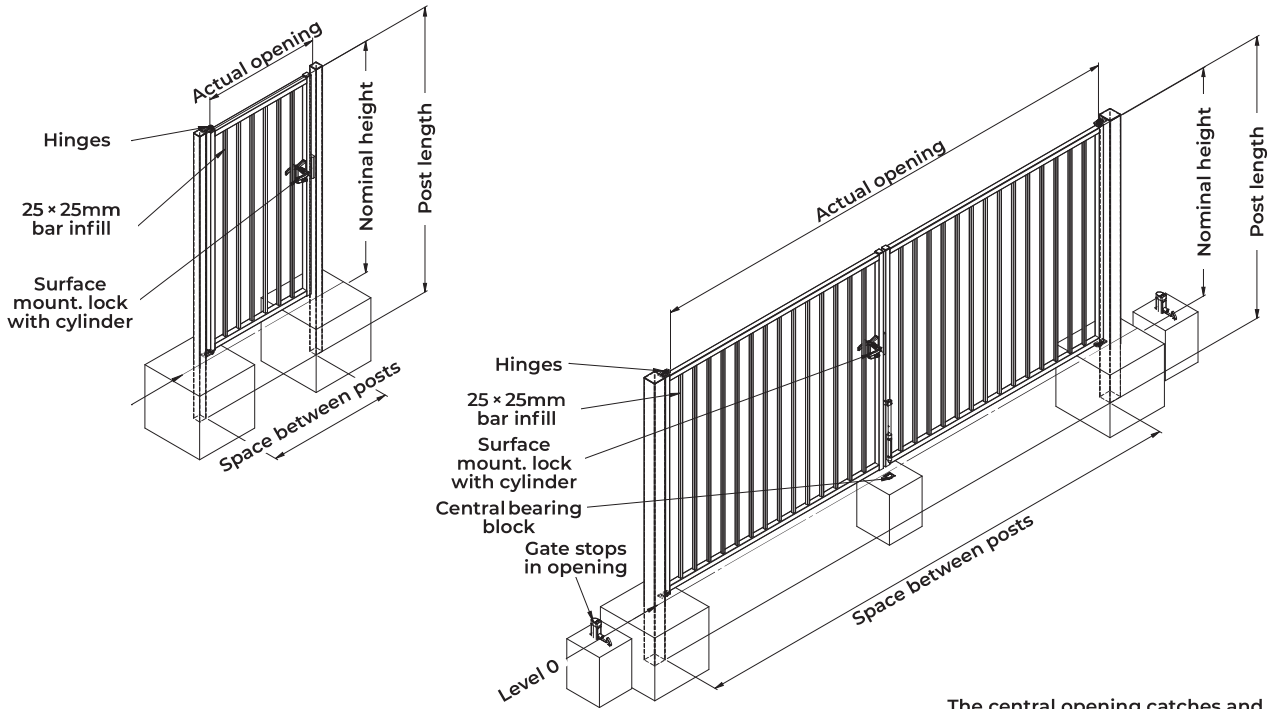

The central opening catches and the drop rod are only delivered with double-leaf gates.

Single-leaf gate

NOMINAL OPENING (m)	1.00	1.25	1.50	2.00
ACTUAL OPENING (m)	0.92	1.20	1.47	1.87
SPACE BETWEEN POSTS (m)	1.05	1.33	1.60	2.00
LEAF LENGTH (m)	1.00	1.27	1.54	1.94
SPACE BELOW LEAF (m)	0.08			

Double-leaf gate

NOMINAL OPENING (m)	3.00	4.00
ACTUAL OPENING (m)	2.99	3.80
SPACE BETWEEN POSTS (m)	3.16	3.97
LEAF LENGTH (m)	1.54	1.95
SPACE BELOW LEAF (m)	0.08	

HEIGHT (m)	POST LENGTH (m)	OPENING WIDTH (m)				FRAME (mm)
		1.00	1.25	1.50	2.00	
		POST SECTIONS (mm)				
1.00	1.50	60x60		60x60		40x40
1.25	1.75					
1.50	2.00	80x80	80x80			
1.75	2.25		100x100			
2.00	2.50	100x100				

HEIGHT (m)	POST LENGTH (m)	OPENING WIDTH (m)		FRAME (mm)
		3.00	4.00	
		POST SECTIONS (mm)		
1.00	1.50	60x60	60x60	40x40
1.25	1.75			
1.50	2.00	80x80	80x80	
1.75	2.25			
2.00	2.50	100x100		

OPTION



- Fence fastening bracket: Allows for assembly directly from a wall or gate post.