



The solution for
flexible vertical
privacy fencing
designed to be cut

PRIVATE
HOMES



PRIVACY SLATS

LIXO®

EASY TO INSTALL

- 60m roll, which must be cut to the height of the rigid panel.
- Installed with mounting clips so no need for tools.

CUSTOMISATION

- Various possible weave patterns:
 - alternate slat placement,
 - play on contrast or two-tone effects,
 - cut the slats to create patterns or achieve partial concealment.

DURABILITY

- Rot-resistant.
- No servicing.
- Reliable interlocking system.

VERSATILE

- Compatible with:
 - new or existing fences,
 - DIRICKX rigid panels:

ARISTA;

AXOR® Classic;

AXIS® S, M, C and SR;

AXYLE® MS, CS, MD and CD

(see the "Rigid Panels" section),

- 2.00 or 2.50m wide rigid panels with the technical features shown opposite:

FEATURES


- PVC weave privacy roll
- Length: 60m
- Width: 48mm
- Thickness: 0.5mm
- Colours: Green 6005 ● and Grey 7016 ●

PACKAGING

- 1 × 60m roll + 100 mounting clips in a blister pack with hook.




Max. dia. 5mm






ROLL CAN BE CUT TO THE HEIGHT OF THE RIGID PANEL

- To calculate the number of 60m rolls you need for your project:

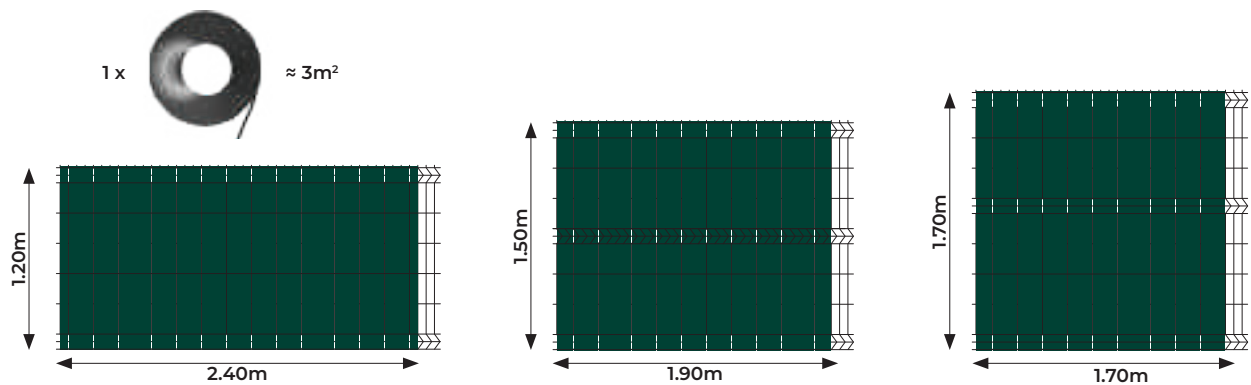


Note: ensure you have extra clips for fences under 1.20m in height.


INSTALLATION PROCEDURE

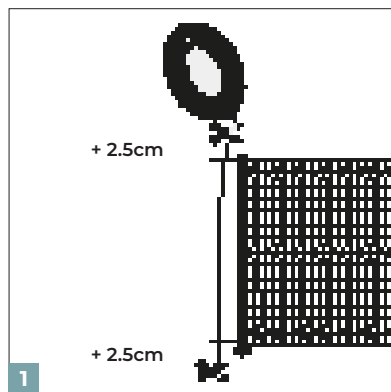


Measure the height of the rigid panel, mark the measurement on the roll, add 5cm and cut.

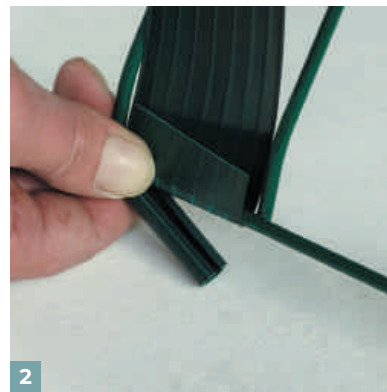


Fold a slat at the bottom of the panel and fasten it with a clip, with the folded side on the side of the fence interior.

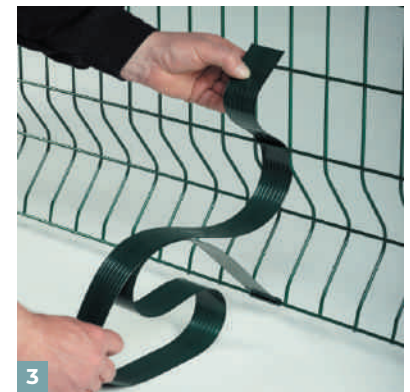

Weave the slat upwards through the panel mesh.

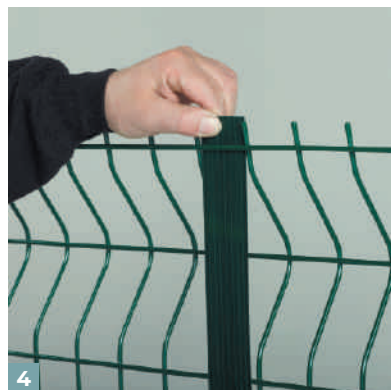


Once you reach the top of the panel, pull the slat taut.

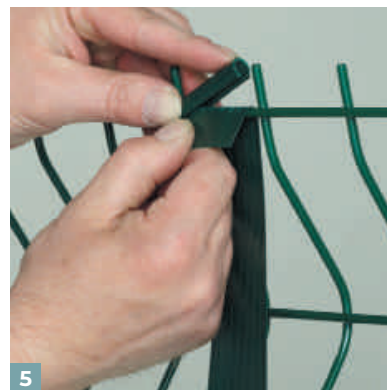

Fold the slat and secure with a clip. Repeat operation.



To ensure the right width for the slat, use a good pair of scissors or shears. Simply follow the edge of the slat across its entire length.

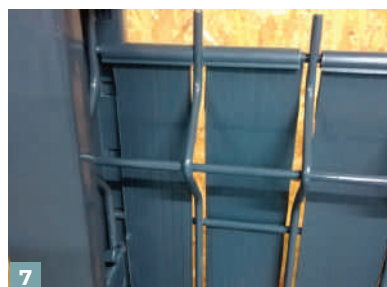

Slats can now be placed at the ends in the same way as the others while still guaranteeing optimum privacy.

Scan this QR code to watch a video showing you how to install LIXO®



Note: any privacy accessories used with fences may potentially render the fence more susceptible to wind damage. Consult our installation recommendations on p. 109.





The solution for
flexible horizontal
woven privacy
fencing

PRIVATE
HOMES



PRIVACY SLATS

LIXO® HORIZONTAL

EASY TO INSTALL

- Kits suitable for flat panels and small-fold panels.
- Roll to be cut to panel width.
- No accessories required for **AXOR®** and **AXIS®** posts; use of plastic clips for **AXYLE®** posts for the model with a smooth finish.

DURABILITY

- Roll made from 100% recyclable polypropylene.
- 5-year UV resistance guarantee.
- Rot-resistant.

EFFECTIVE

- A system providing more privacy than vertical solutions.

ATTRACTIVE

- Smooth or rattan finish.
- Various possible weave patterns.

COMPATIBILITY

- New or existing fences,
- Small-fold panels: **AXYLE® MS** and **CS**, **AXYLE® MD** and **AXYLE® CD**.
- Flat panels: **AXOR® Chic**, **AXIS® D** and **DR** (see the "Rigid Panels" section).

FEATURES

- PVC weave privacy roll kit
- Colour: Grey 7016 ●
- 2 finishes: smooth and rattan
- Smooth finish thickness: 0.85mm
- Rattan finish thickness: 2mm

PACKAGING

- **Small-fold kit (5.65m² screen)*:**
a 25lm x 19cm wide roll
+ a 20lm x 4.75cm wide strip.

- **Flat panel kit (5.25m² screen):**
a 26lm x 19cm wide roll
+ a 5lm x 9.5cm wide strip.
- a 25lm x 9.5cm wide **roll**, packaged in cardboard for screening a gate (with 100mm mesh).

* While stocks last, then replaced by:


- a 26lm x 19cm wide **roll**
 - with plastic clips for a smooth finish,
 - without plastic clips for a rattan finish.
- a 26lm x 9.5cm wide **roll**
 - with plastic clips for a smooth finish,
 - without plastic clips for a rattan finish.



FINISH



Smooth finish

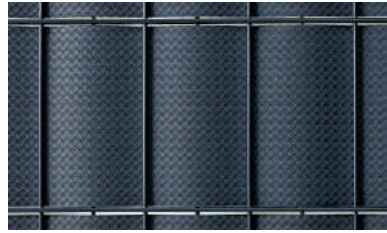

Rattan finish

ROLL CAN BE CUT TO THE HEIGHT OF THE RIGID PANEL

		AXOR® CHIC PANEL		AXIS® D PANEL		AXIS® DR PANEL		AXYLE® PANEL (CD/MD)		AXYLE® PANEL (CS/MS)	
		Panel width: 2000mm Mesh width: 55.55mm		Panel width: 2500mm Mesh width: 50mm		Panel width: 2500mm Mesh width: 50mm		Panel width: 2500mm Mesh width: 55.55mm		Panel width: 2500mm Mesh width: 55.55mm	
AXYLE® POST	Finish	Smooth (with clips)	Rattan	Smooth (with clips)	Rattan	Smooth (with clips)	Rattan	Smooth (with clips)	Rattan	Smooth (with clips)	Rattan
	Length of strips to be cut (cm)	199.5	203	250	254	250.5	255	–	–	250	253
AXIS® POST	Finish	Smooth	Rattan	Smooth	Rattan	Smooth	Rattan	Smooth	Rattan	Smooth	Rattan
	Length of strips to be cut (cm)	207	207.5	257.5	258	258	258.5	256.5	257	–	–
AXOR® POST	Finish	Smooth	Rattan	Smooth	Rattan	Smooth	Rattan	Smooth	Rattan	Smooth	Rattan
	Length of strips to be cut (cm)	205	205	255	255.5	–	–	254.5	255	–	–

INSTALLATION PROCEDURE



Refer to the table above to ensure the strips are cut to the right length. Weave the slat horizontally through the mesh of the panel, positioning it in the rebate of the post at each end.



When installing using **AXYLE®** posts, plastic clips must be used. Clips to be used on the last vertical wire of the panel.

* Bag of 20 clips included for models with a smooth finish.

Note: any privacy accessories used with fences may potentially render the fence more susceptible to wind damage. Consult our installation recommendations on p. 109.





The solution
for ready-to-use
flexible woven
privacy fencing

PRIVATE
HOMES



FLEXIBLE WEAVE PRIVACY SLATS

LIXO® + FINISH

FLAWLESS FINISH

- Slats cut to the height of the panel.
- Clips ensure maximum slat tension.
- Top cap rail to add a touch of style.

CUSTOMISATION

- Alternate slat placement.
- Combine various colours to produce a unique privacy solution.
- Cut the slats to create patterns or achieve partial concealment.

EASY TO INSTALL

- Installed with mounting clips so no need for tools.

DURABILITY

- Rot-resistant.
- No servicing.
- Reliable interlocking system.

PACKAGING



- **LIXO® + Finish** is designed for a 2.00 or 2.50m wide panel and includes:
 - 45 slats to weave into a panel + 90 mounting clips in plastic sheaths the same colour as the product.
- ▲ **Sold separately**
 - A 2.45m top cap rail for large-fold panels and a 2.50m top cap rail for small-fold panels (which can be cut to fit 2.00m wide panels) are available in the following colours: Green 6005 / Grey 7016 / Black 9005 / White 9010 / Wood stain (only available for the 2.45m version).

FEATURES

- Weave privacy slats + PVC top cap rail
- Slat width: 48mm
- 5 heights: 1.00 to 1.90m
- 5 colours
- Slat thickness: 0.50mm

COMPATIBILITY

- With new or existing fences.
- With rigid panels:
 - AXOR® Classic,**
 - AXIS® S, M and C,**
 - AXYLE® MS, CS, MD and CD**
 (see the "Rigid Panels" section).
- With 2.00m or 2.50m wide rigid panels with the following features:

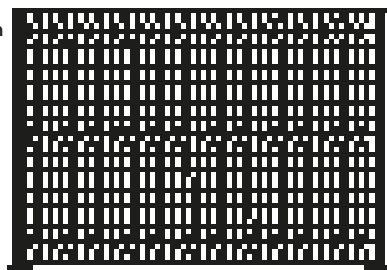



TECHNICAL FEATURES

HEIGHT (m)	1.00	1.20	1.50	1.70	1.90
COLOURS	Beige 1015 ●, Green 6005 ●, Grey 7016 ●, Black 9005 ●, White 9010 ○				

INSTALLATION PROCEDURE



1
Fold a slat at the bottom of the panel and fasten it with a clip, with the **folded side on the side of the fence interior**.




2
Weave the slat upwards through the panel mesh.



3
Pull the slat taut once you have reached the top of the panel.



4
Fold the slat and secure with a clip.

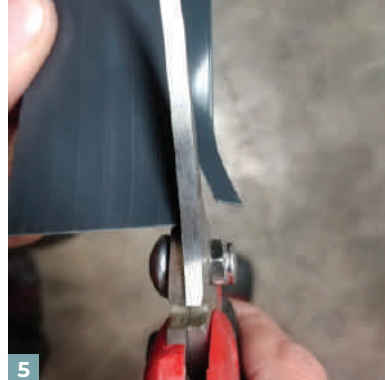

5
In some cases, the slat at the end of the panel may be too wide. It may need to be cut so that it can pass between the post and the mesh of the panel. To ensure the right width for the slat, use a good pair of scissors or shears. Simply follow the edge of the slat across its entire length.

Scan this QR code to watch a video showing you how to install LIXO® + Finish



6
Once the panel is fully woven, fasten the cap rail to the top of the panel with the **notched side on the side of the fold**.

RELATED PRODUCTS



Bag of plastic clips



Cap rail

Note: any privacy accessories used with fences may potentially render the fence more susceptible to wind damage. Consult our installation recommendations on p. 109.



A new concept
combining
the advantages
of flexible and
rigid privacy
systems

PRIVATE
HOMES



RIGID PRIVACY SLATS

LIXO® 3D

QUICK AND EASY TO INSTALL

- No tools or accessories required.
- Non-weavable slats.
- Option of using a kit to adjust the steps on the lower section by 20cm compared to the height of the fence.

DURABILITY

- Polypropylene slats.
- 5-year UV resistance guarantee.
- Maintenance-free solution.

• FLAWLESS FINISH

- A bottom rail ensures alignment of the slats in the upper section.
- The flexible slats adjust to the shape of the fence.
- 3D effect provided by the thermoplastic net.

COMPATIBILITY

- For small-fold panels: 3 folds recommended.
- Perfect with the **AXYLE®** post (see the “Rigid Panels” section), an adaptation kit is required for the **AXIS®** post (see the “Rigid Panels” section).

FEATURES

- Polypropylene slats and thermoplastic folding net
- 4 Heights: 1.50, 1.70, 1.90 and 2.10m
- Colour: Grey 7016 ●
- Thickness: 2mm

CUSTOMISATION

- Option of creating patterns as preferred.

GREATER PRIVACY

- Option of raising your fence (by using a kit higher than the nominal height of your fence, 20cm maximum).
- The 3D effect increases the privacy provided by the slats.



KIT

CONTENTS

- 45 slats, 74mm each,
- a lower cap rail in 3 sections of 82cm.





EASY TRANSPORTATION

- Single-size packaging (120 × 60 × 10cm), easily transportable, for all heights of slats.

CUSTOMISATION

Many customisation options

Examples of possible styles:

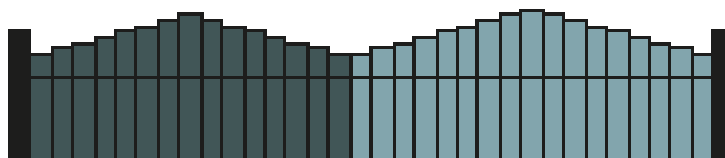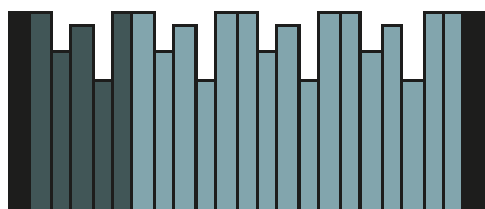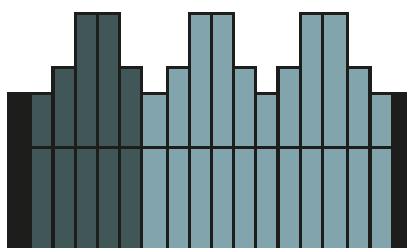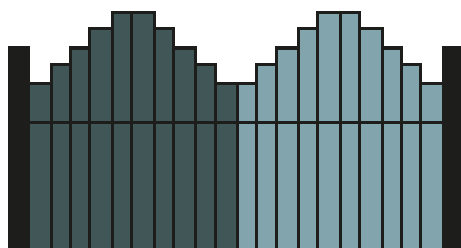

INSTALLATION PROCEDURE



1
Clip on the bottom rail used
to hold the slats.



2
Slide the slats into the folds.
No reinforcement required.



3
Customise your fence with
varying heights.


OPTIONAL

ADAPTATION KIT FOR THE AXIS POST

4 sections of square tube measuring 33 x 33mm and 95mm long.

Place the square tube in the rebate of the **AXIS®** post with the crimped side facing the rigid panel.

This will allow the **LIXO® 3D** privacy fencing to rest on the crimped side and thus be well supported.



Note: any privacy accessories used with fences may potentially render the fence more susceptible to wind damage. Consult our installation recommendations on p. 109.





Privacy
fencing with
the warmth
of wood

RIGID PRIVACY SLATS

LIXO® WOOD

**PRIVATE
HOMES**



PEACE OF MIND

- 10-year guarantee against wood-eating insects.

PACKAGING

- 43 slats of 46mm each.
- 2 edge slats of 41mm each.
- Thickness of 7mm.
- 6 reinforcement elements of 1.25m adapted to small-fold or large-fold kits.
- Supplied in large or small-fold kit by height (1.50, 1.70 and 1.90m). Depending on the chosen height, each kit is designed to fully screen 1 panel.

FEATURES

- Privacy fence slats made from Nordic spruce, autoclave treated, class 3.2
- Sourced from northern European forests, certified FSC

COMPATIBILITY

- Small-fold and large-fold panels.

FINISH

- Reinforcements to fit the panel folds.
- Slats cut to the panel height.
- Natural finish (the wood blends into the outdoor environment).

SIMPLIFIED TABLE OF OPERATIONAL CLASSES (MAINLAND FRANCE)

CLASS 1	CLASS 2	CLASS 3.1	CLASS 3.2	CLASS 4
Indoors, fully protected from adverse weather, not exposed to humidification.	Indoors or under shelter, protected from adverse weather, occasional non-persistent humidification (condensation).	Not in contact with the ground, subject to frequent humidification for short periods. Complete drying between two periods of humidification.	Not in contact with the ground, subject to frequent humidification for long but not continuous periods. Complete drying between two periods of humidification.	Exterior, in contact with the ground or subject to recurring humidification or immersion in fresh water, design inducing significant water retention, very high level of humidification induced.

NB:


- Infestations by xylophagous insects, including termites, can occur in all operational classes.
- References for the standards to be read: EN 335, EN 350-2 and NF B 50-105-3, FD P 20651.




INSTALLATION PROCEDURE

Simple and intuitive installation:


① To prevent the slats twisting, we recommend installation as soon as the coil is unwound.

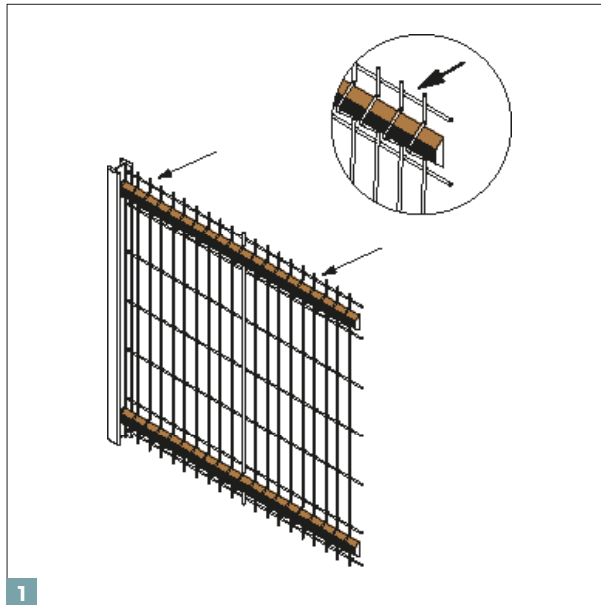

1 Slide the reinforcement elements horizontally into the folds.

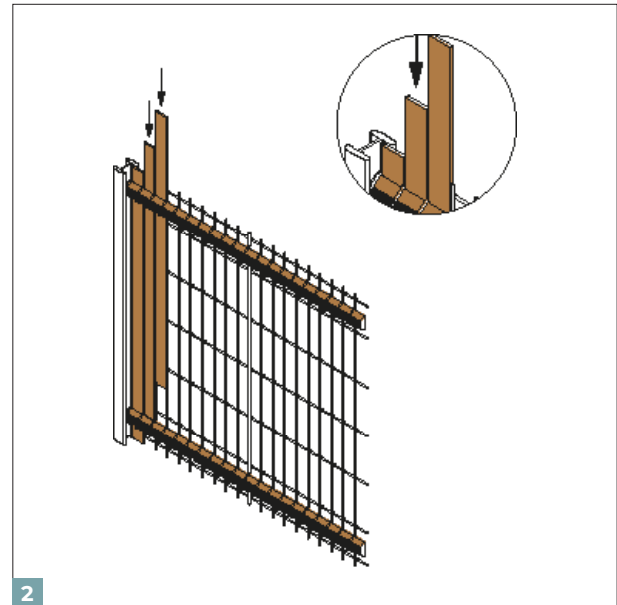


2 Slide the slats into the mesh, carefully ensuring that they are not in contact with the ground.

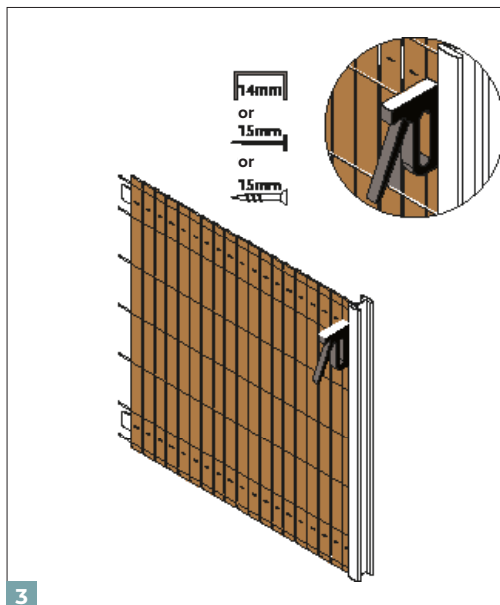


3 Attach each of the slats to the upper and lower reinforcement elements with 15mm stainless steel nails or 14mm stainless steel staples.
⚠ Nails and staples not provided.



CHOICE OF 2 KITS



Kit for small-fold panels

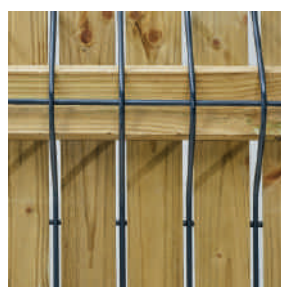

Kit for large-fold panels

WOOD IS A LIVING MATERIAL

Pockets of resin, small knots or splits are normal characteristics specific to wood.

The colour of the slats may change, becoming slightly grey: this is not a defect, it is a natural wood characteristic.

Note: any privacy accessories used with fences may potentially render the fence more susceptible to wind damage. Consult our installation recommendations on p. 109.





The high-end,
premium quality
solution for
professionals

PRIVATE
HOMES



RIGID PRIVACY SLATS

LIXO® TOP

FLAWLESS FINISH

- Straight slats cut to the panel height.
- Reinforcements to fit the panel folds.
- Top cap rail in a single unit to add a touch of style.

QUICK AND EASY TO INSTALL

- No tools or accessories required.
- Rigid slats (non-weavable) with patented quick attachment.

DURABILITY

- Durable slat profile.
- 100% virgin PVC, mass-stained + anti-UV treated.
- Rot-resistant and maintenance-free solution.

FEATURES

- Rigid PVC privacy slats
- Slat width: 48mm
- 5 heights: 1.00 to 1.90m
- 5 colours including a wood stain finish
- Thickness in the centre: 1mm
- Maximum thickness: 5.7mm




Non-weavable slats



Small-fold reinforcement



Large-fold reinforcement

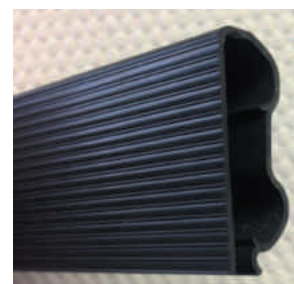

Top cap rail



TECHNICAL FEATURES

HEIGHT (m)	1.00	1.20	1.50	1.70	1.90
COLOURS	Green 6005 ●, Grey 7016 ●, Black 9005 ●, White 9010 ○, Wood stain ●				

Black / White / Wood stain options are available for small-fold panel kits in the following heights: 1.20, 1.50, and 1.70m.

PACKAGING

A **LIXO® Top** kit is designed for a 2.00 or 2.50m wide panel and includes:

- 45 rigid PVC slats:
 - 43 slats 48mm wide,
 - 2 slats 45mm wide (for the 2 mesh sections at the panel ends),
 - PVC reinforcement elements for the panel folds (can be cut to fit 2m wide panels):
 - 2 reinforcement elements for heights of 1 and 1.20m,
 - 3 reinforcement elements for heights of 1.40m and above.
- * For installation with an **AXIS® S** panel, height 1.90m, allow for an additional reinforcement element per panel.*
- A 2.47m long PVC top cap rail (which can be cut to fit 2.00m wide panels).

COMPATIBILITY

- With new or existing fences.
- With DIRICKX large fold panels: **AXOR® Classic**, **AXIS® S**, **M** and **C**.
- With **AXYLE® MS**, **CS**, **MD** and **CD** small-fold panels (see the “Rigid Panels” section).
- With the **AXYLE®** privacy gate (see the “Residential Gates” section).

INSTALLATION PROCEDURE



1 Position a reinforcement element in the first fold of the panel (top).




2 Slide a slat (48mm), with the **tab facing the fold**, into a mesh in the centre of the panel to maintain the reinforcement element. Slide it up to the next folds. Repeat the operation for each of the folds.



3 Identify the 2 end slats (45mm). Slide them in the first mesh at each end of the panel, with the **tab facing the fold**.



4 Slide the 48mm slats in each mesh until the panel has been completely filled.

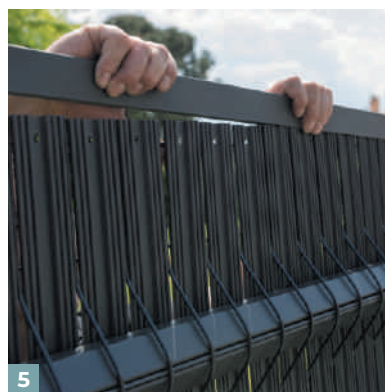

5 Fasten the cap rail at the top of the panel with the **flat side on the side of the fold** of the panel to secure the slats.

Scan this QR code to watch a video showing you how to install LIXO® Top



Note: any privacy accessories used with fences may potentially render the fence more susceptible to wind damage. Consult our installation recommendations on p. 109.