



DIRICKX ANTI-CORROSION GUARANTEE
10 YEARS POLYESTER
DIRICKX ANTI-CORROSION GUARANTEE
PROTECT+

The modern flat panel

RIGID PANEL FENCING **AXOR® CHIC**

PRIVATE HOMES



STYLISH AND SECURE

- Panel without folds combining single vertical wires and double horizontal wires.
- Sleek design blends in seamlessly with modern housing.
- Unique on the residential market.

QUICK AND EASY TO INSTALL

- Recommended installation in forward sequence without accessories with **AXOR®** slotted posts, also compatible with **AXOR® PLUS** and **AXIS®** posts: the panel slots into the grooves on the post (see the "Posts & Accessories" section).
- Installation in forward sequence with the **AXYLE®** H-shaped post: attached to post using plastic or metal clips (see the "Posts & Accessories" section).
- Suitable for all terrains: curved, angled or sloping premises.
- Wide range of possible configurations: on base plates, on walls, with concrete gravel boards.

COMPATIBILITY

- Only compatible with the **LIXO®** Horizontal PRIVACY FENCING SYSTEM (see the "Privacy Fencing" section)

FEATURES



Flat panel



Width: 2000 mm



Mesh:
(200 x 55 mm)



Wire diameter:
Vertical dia.: 4 mm
Horizontal dia.:
2 x 4.50 mm



Heights:
0.60 / 1.00 / 1.20 /
1.50 / 1.70 m

• High adherence polyester-coated galvanised steel wire

- Centre distance with **AXOR®** posts: 2035 mm
- Centre distance with **AXOR® PLUS** post: 2035 mm
- Centre distance with **AXYLE®** posts: 2020 mm
- Centre distance with **AXIS®** post: 2060 mm

6005 Moss green

7016 Anthracite grey

7035 Light grey

9005 Jet black

9010 Pure white

7030 Stone grey





Optional:

- **Matt and textured finishes**
- **"Protect+"** coating



TECHNICAL FEATURES

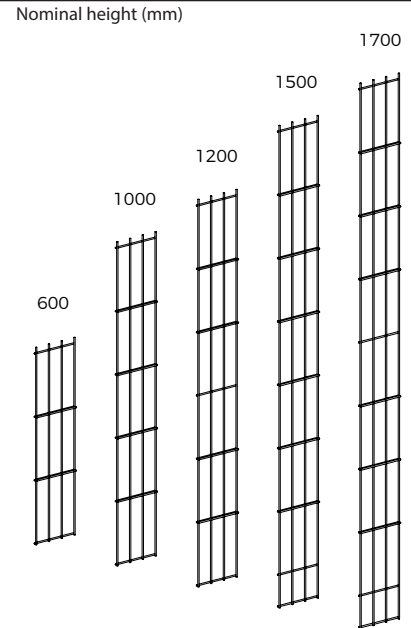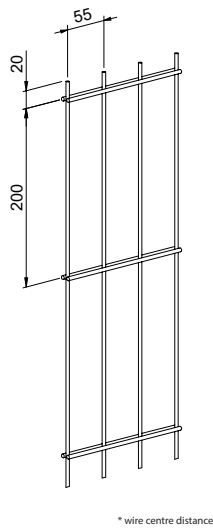

| FENCE HEIGHT (m) | PANEL WIDTH (mm) | AXOR® POST | | AXOR® PLUS POST | | AXIS® POST | | AXYLE® POST | | COMPATIBLE PRIVACY FENCING | | COMMENTS |
|--|------------------|------------|-----------------|-----------------|-----------------|------------|------------------|-------------|-----------------|----------------------------|-----------------------------|----------|
| | | EMBEDDED | ON WELDED PLATE | EMBEDDED | ON WELDED PLATE | EMBEDDED | ON WELDED PLATES | EMBEDDED | ON SLEEVE PLATE | AXOR® AND AXOR® PLUS POST | AXIS®, AXYLE® AND REX POSTS | |
| 0.60 | 2000 | 1.10 | 0.65 | 1.00 | 0.65 | - | | 1.00 | 1.00 | LIXO® Horizontal | LIXO® Horizontal | - |
| 1.00 | | 1.50 | 1.05 | 1.40 | 1.05 | 1.60 | 1.05 | 1.50 | | | | |
| 1.20 | | 1.70 | 1.25 | 1.70 | 1.25 | 1.80 | 1.25 | 1.70 | 1.50 | | | |
| 1.50 | | 2.00 | 1.55 | 2.00 | 1.55 | 2.00 | 1.55 | 2.00 | | | | |
| 1.70 | | 2.20 | 1.75 | 2.20 | 1.75 | 2.20 | 1.75 | 2.20 | - | | | |
| COMPATIBLE CONCRETE GRAVEL BOARD (mm)* | - | 2020 | - | 2025 | - | 2025 | - | 2000 | - | - | - | - |

* Concrete gravel boards are not sold by Dirickx

COMPATIBLE POSTS



AXYLE® POST



AXOR® POST

And also:

- AXOR PLUS® post
- AXIS® post (see the "Posts & Accessories" section).

OPTIONS


- **Installation with steps:** calculate post length based on the required offset (10 cm steps with the **AXOR®**, **AXOR® PLUS** and **AXIS®** / 2 cm with the **AXYLE®** post).
- **Installation on welded or removable base plates.**
- **Installation with concrete gravel board:** use long-embedded posts + board height of 25 or 50 cm.
- **Wall fastening.**




Installation with steps



Base-plated post



Gravel board



Wall fastening

ADDITIONAL PRODUCTS



AXOR® SIDE GATES

- LIXO® Horizontal privacy fencing system
- AXOR® gate (see the "Residential Gates" section).

THE DIRICKX SUGGESTION

Flat panel combined with LIXO® Horizontal privacy slats (see the "Privacy Fencing" section)

