

# **AXYLE®** Small-fold gate **AXIS®** Large-fold gate









#### **PRIVACY FENCING**

- Compatible with all privacy fencing systems:
  LIXO® TOP, LIXO® WOOD 7 and 22 mm and
  LIXO® 3D for small folds.
- Adjustable offset hinges to minimise the gap between the leaf and the posts for optimal

#### SIMPLICITY

- Adjustable distance between the gate and the post.
- Insert system: can be embedded or base-plated (to be specified when ordering).
- $\boldsymbol{\cdot}$  Configurator with repair option (post and leaf).

#### QUALITY

- The AXYLE® gate is supplied with a lower privacy clamp.
- $\cdot$  Professional quality 10-year guarantee.
- Aluminium and stainless steel accessory.
- Top rail provided to protect the spikes if the side gate is not covered.
- Reversible opening direction (right push/pull or left push/pull).
- UNIWING handle
- Perfect matching with the panel and sides gates/ gates.

#### **FEATURES**



5 heights: 1.00 / 1.25 / 1.50 / 1.70 / 1.90 m



3 openings: 3.00 / 3.50 / 4.00 m



Base-plated



Embedded



Mesh size: 200 x 55 mm



Wire thickness: 5 mm

· Galvanised steel and polyester plastic coating










#### Optional:

- Matt and textured finishes
- "Protect+" coating

#### MATCHES

Fences: see the "Rigid Panels & Privacy Fencing" section

### **Technical features**

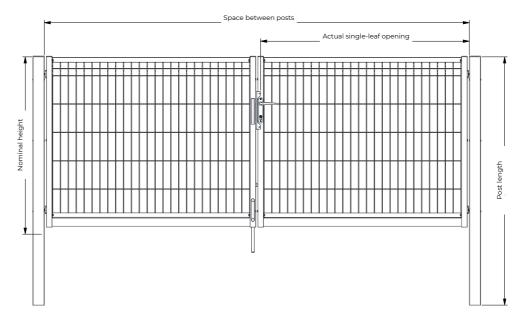

DESCRIPTION	DIMENSIONS (m)		
Nominal opening	3.00	3.5	4.00
Actual opening	2.97	3.52	3.97
Space between posts	3.00	3.55	4.00
Leaf length	1.47	1.75	1.98
Space below leaf	0.06	0.06	0.06
Embedded length	0.50	0.50	0.50
Post section (cm)	80 x 80		

NOMINAL HEIGHT (m)	POST LENGTH (m)		FRAME THICKNESS	INFILL (mm)
	BASE- PLATED	EMBEDDED	(mm)	INFILL (mm)
1.00	1.06	1.56		
1.20	1.26	1.76	40 mm	AXYLE®CS or AXIS®C panel, 200 x 55 mm mesh dia. of wire: horizontal 5 mm, vertical 5 mm
1.50	1.56	20.6		
1.70	1.76	2.26		
1.90	1.96	2.46		

## Installation recommendations for privacy systems on the gates

Unlike the panels, the gate does not have narrower mesh at the ends: therefore, it is possible to use the largest slats in the kit.

TYPE OF PRODUCT	OPENING (m)	NUMBER OF SLATS REQUIRED
Gate	1.50	25 x 2
	1.75	30 x 2
	2	34 x 2

CUTTING HEIGHT FOR THE PRIVACY SLATS	1.00	1.20	1.50	1.70	1.90
SLAT HEIGHT (mm)	923	1123	1423	1623	1823

⚠ Warning: for installation, the lower part of the slats must be positioned on the gate frame.

## **Options**



 $\boldsymbol{\cdot}$  Wall fastenings: to mount the fence straight onto the gate post (sold separately).



· U-shaped angle bar for SOUBAX® gravel board